



DispenserONE FLEXI 17” is a 10 Liter capacity dispenser of sanitizing chemicals, designed to be installed in small to medium-sized sites such as supermarkets, franchises and public offices. Furthermore, it allows the customers to unlock additional revenues by selling advertising space or displaying promotions.

### MODELS:

- DispenserONE FLEXI 17”

### KEY FEATURES and BENEFITS

- Maximum tank capacity of 10 Litres (canister not included) allows more than 10.000 doses of sanitizing gel in average, minimizing the servicing due to tanks refilling/replacement, especially in places with high influx of people. The unit comes with a tank of 10 liters included in the package.
  - Touch free dispensing through proximity sensor guarantees maximum hygiene and safety.
  - Peristaltic dosing with single shot time adjustment ensures flexibility of the dispensing depending on the type of sanitizer to be dosed..
  - Robust design with metal enclosure, yet contained footprint of the unit, makes it suitable to every kind of facility.
  - Integrated level with audible alarm control gives direct warnings to the owner avoiding lack of disinfectant in the device.
  - Mains power supply avoids waste of batteries and frequent maintenance due to batteries replacement.
- The unit is provided with wheels to allow easy transportation and placement; the metal basement is provided with holes for optional ground fixation.
  - Wide frontal flat surface ensures easy bespoke branding with custom logo and colour.
  - Key door lock secures chemical canister preventing from thefts or tampering.
  - Wide 17” display allows the customers to unlock additional revenues by selling advertising space or displaying promotions by loading custom videos via integrated USB port.


# DISPENSER Series

## Dispenser ONE® FLEXI 17”



TECHNICAL FEATURES	
TYPE	DispenserONE® FLEXI 17”
CERTIFICATIONS	CE, EAC
MAXIMUM TANK CAPACITY	10 liters (included)
MINIMUM CANISTER OPENING	32 mm
DISPENSING RATE	Adjustable dosing time from 0,2 to 2 seconds
POWER SUPPLY	100÷240 Vac @50/60 Hz
ELECTRICAL CLASS	Class I (ground connected)
ACTIVATION	Touch free via proximity sensor
MAX CONSUMPTION	20 W
OPERATING TEMPERATURE	10-50°C
STORAGE TEMPERATURE	-20÷60°C
CASE MATERIAL	Zinc plated Iron
MAX UNITS PER PALLET	6
WEIGHT	30 Kg

### DIMENSIONS

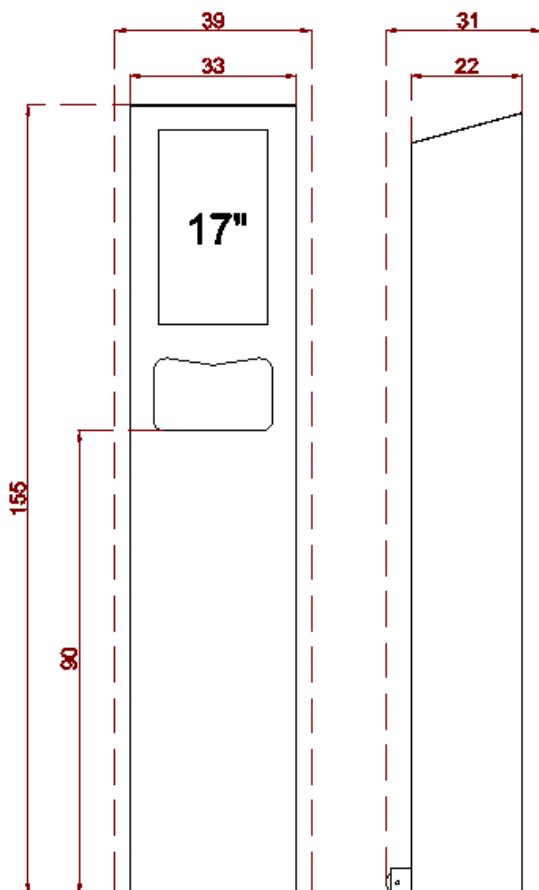

Your Choice,  
Our Commitment