



DispenserONE FLEXI Thermoscan is a 10 Liter capacity dispenser of sanitizing chemicals, designed to be installed in small to medium-sized sites such as supermarkets, franchises and public offices. Furthermore, it allows temperature measurement and mask recognition to enable an output relay typically used to open a door or a turnstile.

### MODELS:


- DispenserONE FLEXI Thermoscan

### KEY FEATURES and BENEFITS

- Maximum tank capacity of 10 Litres allows more than 10.000 doses of sanitizing gel in average, minimizing the servicing due to tanks refilling/replacement, especially in places with high influx of people. The unit comes with a tank of 10 liters included in the package.
  - Touch free dispensing through proximity sensor guarantees maximum hygiene and safety.
  - Peristaltic dosing with single shot time adjustment ensures flexibility of the dispensing depending on the type of sanitizer to be dosed..
  - Robust design with metal enclosure, yet contained footprint of the unit, makes it suitable to every kind of facility.
  - Integrated level with audible alarm control gives direct warnings to the owner avoiding lack of disinfectant in the device.
  - Mains power supply.
  - The unit is provided with wheels to allow easy transportation and placement; the metal basement is provided with holes for optional ground fixation.
- Wide frontal flat surface ensures easy bespoke branding with custom logo and colour.
  - Key door lock secures chemical canister preventing from thefts or tampering.
  - On-board thermoscan and mask recognition system allows customers to use the output relay to enable, for example, the opening of a door or turnstile.
  - To enable the output relay, the customer can choose between four verification solutions:
    - Body temperature measurement, face mask detection and hand sanitizing
    - Body temperature measurement, face mask detection
    - Hand sanitizing
    - None (Output relay disabled)
  - Internal web server for settings via Wi-Fi with PC, smartphone or tablet to choose the type of verification to enable the relay and to upload customized audio messages.

TECHNICAL FEATURES	
TYPE	DispenserONE® FLEXI Thermoscan/Mask
CERTIFICATIONS	CE, EAC
MAXIMUM TANK CAPACITY	10 liters (included)
MINIMUM CANISTER OPENING	32 mm
DISPENSING RATE	Adjustable dosing time from 0,2 to 2 seconds
POWER SUPPLY	100÷240 Vac @50/60 Hz
ELECTRICAL CLASS	Class I (ground connected)
ACTIVATION	Touch free via proximity sensor
MAX CONSUMPTION	40 W
OPERATING TEMPERATURE	10-50°C
STORAGE TEMPERATURE	-20÷60°C
CASE MATERIAL	Zinc plated Iron
MAX UNITS PER PALLET	6
WEIGHT	30 Kg

### DIMENSIONS

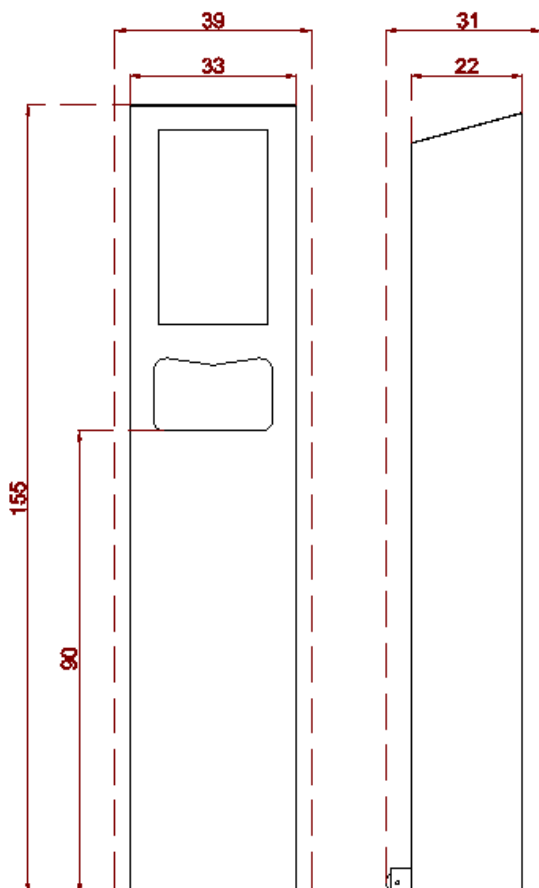

Your Choice,  
Our Commitment