

DispenserONE® FLEXI Thermoscan

seko

DispenserONE® Flexi Thermoscan is a 10-litre-capacity dispenser of sanitizing chemicals, designed to be installed in small to medium-sized sites such as supermarkets, franchises and public offices. Furthermore, it allows temperature measurement and mask recognition to enable an output relay, typically used to open a door or turnstile.

Product Features

- Maximum tank capacity of 10 litres allows more than 10,000 doses of sanitizing gel on average, minimizing refill requirement, especially in places with a high influx of people. The unit comes with a 10-litre tank included in the package.
- Touch-free dispensing via proximity sensor guarantees maximum hygiene and safety.
- Peristaltic dosing with single shot fine adjustment ensures maximum dosage accuracy and repeatability.
- Robust design with metal enclosure, contained within a minimal footprint, making DispenserONE® suitable for every site.
- Integrated level control gives direct and remote warnings to the owner, helping to prevent the device running dry.
- Mains power supply removes environmental and maintenance cost of single-use disposable batteries.
- The unit is provided with wheels to allow easy transportation and placement; a metal base is provided with holes for optional ground fixing.
- Wide, flat front surface ensures bespoke branding is easily applied with custom logo and colour.
- Key-operated door lock secures chemical canister, protecting against theft or tampering.
- On-board thermoscan and mask-recognition system allows operators to control entry, via relay connection to a door or turnstile.
- To enable the output relay, the operator can choose between four verification criteria:
 - a) Body temperature measurement, face mask detection and hand sanitizing
 - b) Body temperature measurement, face mask detection
 - c) Hand sanitizing
 - d) None (output relay disabled)
- Internal web server allows the operator to set entry criteria and upload customized audio messages via Wi-Fi.



[Learn More](#)

Your Choice,
Our Commitment


Technical data can be changed without notice.
TD_DispenserONE_FLEXI Thermo_Mask_rev 1.

DispenserONE® FLEXI Thermoscan

seko

Technical Features

Certifications	CE, EAC
Tank Capacity	10 liters (included)
Canister Opening	32 mm
Dispense Rate	Adjustable dosing time from 0,2 to 2 seconds
Power Supply	100÷240 Vac @50/60 Hz
Battery Type	Class I (ground connected)
Activation	Touch free via proximity sensor
Max Consumption	40 W
Operating Temperature	10-50°C
Storage Temperature	-20÷60°C
Case Material	Zinc plated Iron
Max Units (per pallet)	6
Weight	30 Kg

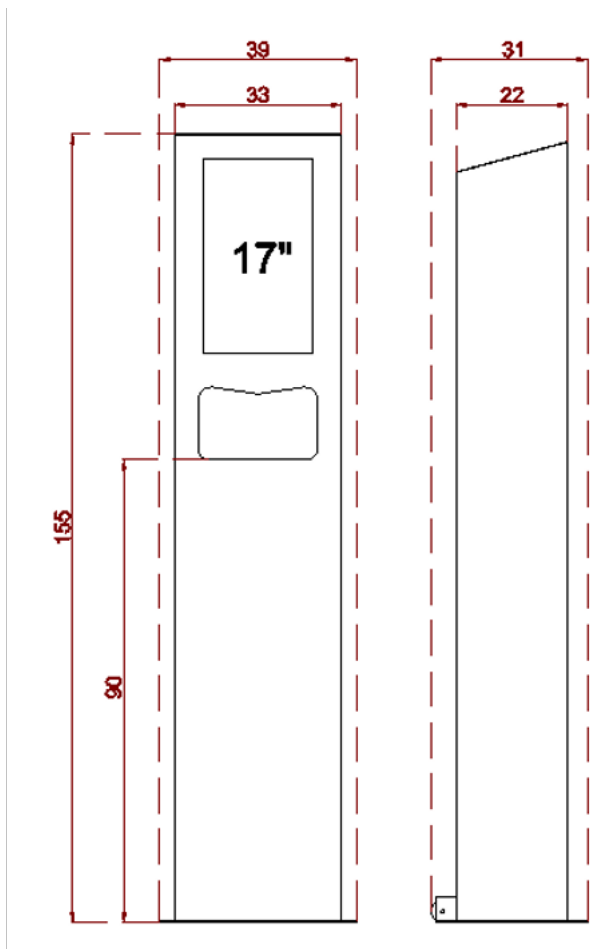

Your Choice,
Our Commitment

Technical data can be changed without notice.
TD_DispenserONE_FLEXI Thermo_Mask_rev 1.