

DispenserONE® FLEXI 17"

seko

DispenserONE® Flexi 17" is a 10-litre-capacity dispenser of sanitizing chemicals, designed to be installed in small to medium-sized sites such as supermarkets, franchises and public offices. Furthermore, it allows the customer to unlock additional revenue by selling advertising space or displaying promotions.

Product Features

- Maximum tank capacity of 10 litres allows more than 10,000 doses of sanitizing gel on average, minimizing refill requirement, especially in places with a high influx of people. The unit comes with a 10-litre tank included in the package.
- Touch-free dispensing via proximity sensor guarantees maximum hygiene and safety.
- Peristaltic dosing with single shot fine adjustment ensures maximum dosage accuracy and repeatability.
- A robust design with metal enclosure, within a minimal footprint, makes DispenserONE® suitable for every site.
- Integrated level control with audible alarm gives direct low-product warnings to the operator, helping to prevent the device running dry.
- Mains power supply removes environmental and maintenance cost of single-use disposable batteries.
- The unit is provided with wheels to allow easy transportation and placement; a metal base is provided with holes for optional ground fixing.
- Wide, flat front surface ensures bespoke branding is easily applied with custom logo and colour.
- Key-operated door lock secures chemical canister, protecting against theft or tampering.
- Wide 17" display allows the operator to unlock additional revenue by selling advertising space or displaying promotions through custom videos uploaded remotely or via USB.



[Learn More](#)

Your Choice,
Our Commitment


Technical data can be changed without notice.
TD_DispenserONE FLEXI 17"_rev 1.

DispenserONE® FLEXI 17"

seko

Technical Features

CERTIFICATIONS	CE, EAC
MAXIMUM TANK CAPACITY	10 liters (included)
MINIMUM CANISTER OPENING	32 mm
DISPENSING RATE	Adjustable dosing time from 0,2 to 2 seconds
POWER SUPPLY	100÷240 Vac @50/60 Hz
ELECTRICAL CLASS	Class I (ground connected)
ACTIVATION	Touch free via proximity sensor
MAX CONSUMPTION	20 W
OPERATING TEMPERATURE	10-50°C
STORAGE TEMPERATURE	-20÷60°C
CASE MATERIAL	Zinc plated Iron
MAX UNITS PER PALLET	6
WEIGHT	30 Kg

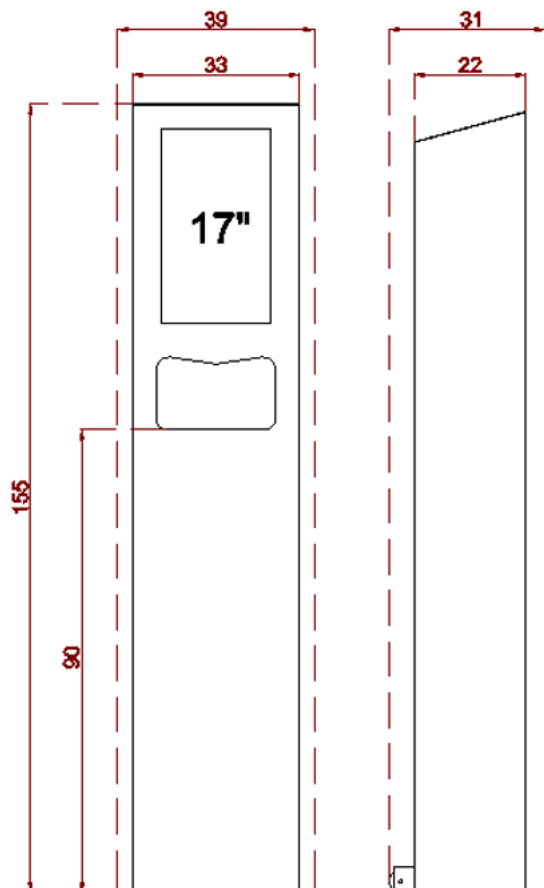

Your Choice,
Our Commitment

Technical data can be changed without notice.
TD_DispenserONE FLEXI 17" _rev 1.